


Drum Pulleys

Drum Conveyor Pulleys of 12" diameter and larger are formed in custom-designed crowning rolls by a cold forming process that increases the strength of the steel. Rims are formed in one-piece construction. This perfected construction technique also permits the use of internal discs, greatly reducing radical deformation and longitudinal deflection in the rim. Available in standard and heavy duty construction in sizes 12" through 60" O.D., 12" through 63" face width.

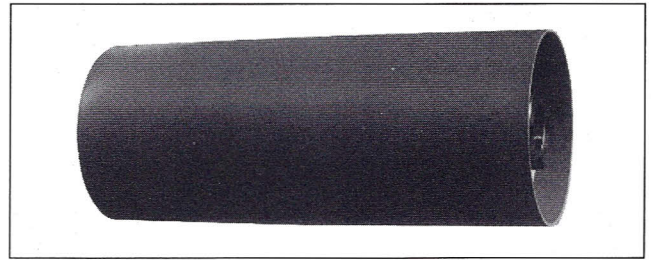

Assinck's Drum Pulley are rolled in specially designed plate rolls with crown built into the rolls. With our design, you receive a uniformly crowned conveyor pulley, each time you order.

- Full depth submerged arc welds with hubs welded to end disc.
- Popular styles of tapered compression hubs available.
- Engineered pulleys available for special applications.

Assinck's Lagged Drum Conveyor Pulleys contain black rubber lagging without fabric backing, bonded directly to the pulley rim by the vulcanizing process. This lagging serves primarily to increase the tractive capacity of drive pulleys and to provide improved resistance to abrasive conditions on both drive and non-drive pulleys. Furnished with smooth surface, or with grooving in herringbone or other patterns, and available in various fabrics or material.

Welded Steel Drum Conveyor Pulleys - Crown Face Available Sizes

Note: Heavy Duty Crown Faced Pulleys are available in 3/8" Shells - 1/2", 3/4" and 1" End Disc in 26", 32", 44", 51" and 63" Face Width

ITEM NO:	BUSHING	MAX BORE	FACE WIDTH	WT-LBS
10" DIAMETER				
D10C08XT20	XTB20	2.0"	8"	41
D10C10	XTB20	2.0"	10"	45
D10C12	XTB20	2.0"	12"	49
D10C14	XTB20	2.0"	14"	54
D10C16	XTB20	2.0"	16"	58
D10C18	XTB20	2.0"	18"	63
D10C20	XTB20	2.0"	20"	67
D10C26	XTB20	2.0"	26"	80
D10C32	XTB20	2.0"	32"	94
D10C38	XTB20	2.0"	38"	107
D10C08XT25	XTB25	2.5"	8"	45
D10C10	XTB25	2.5"	10"	49
D10C12	XTB25	2.5"	12"	54
D10C14	XTB25	2.5"	14"	58
D10C16	XTB25	2.5"	16"	63
D10C18	XTB25	2.5"	18"	67
D10C20	XTB25	2.5"	20"	71
D10C26	XTB25	2.5"	26"	85
D10C32	XTB25	2.5"	32"	98
D10C38	XTB25	2.5"	38"	111
D10C08XT30	XTB30	3.0"	8"	51
D10C10	XTB30	3.0"	10"	55
D10C12	XTB30	3.0"	12"	60
D10C14	XTB30	3.0"	14"	64
D10C16	XTB30	3.0"	16"	69

ITEM NO:	BUSHING	MAX BORE	FACE WIDTH	WT-LBS
10" DIAMETER				
D10C18	XTB30	3.0"	18"	73
D10C20	XTB30	3.0"	20"	78
D10C26	XTB30	3.0"	26"	91
D10C32	XTB30	3.0"	32"	104
D10C38	XTB30	3.0"	38"	118
12" DIAMETER				
D12C08XT25	XTB25	2.5"	8"	56
D12C10	XTB25	2.5"	10"	61
D12C12	XTB25	2.5"	12"	66
D12C14	XTB25	2.5"	14"	72
D12C16	XTB25	2.5"	16"	77
D12C18	XTB25	2.5"	18"	82
D12C20	XTB25	2.5"	20"	88
D12C26	XTB25	2.5"	26"	104
D12C32	XTB25	2.5"	32"	120
D12C38	XTB25	2.5"	38"	136
D12C44	XTB25	2.5"	44"	169
D12C08XT30	XTB30	3.0"	8"	62
D12C10	XTB30	3.0"	10"	67
D12C12	XTB30	3.0"	12"	71
D12C14	XTB30	3.0"	14"	78
D12C16	XTB30	3.0"	16"	83